


NOTE: SEE DETAIL 11 FOR
SEWER LATERAL CLEANOUT
DETAIL

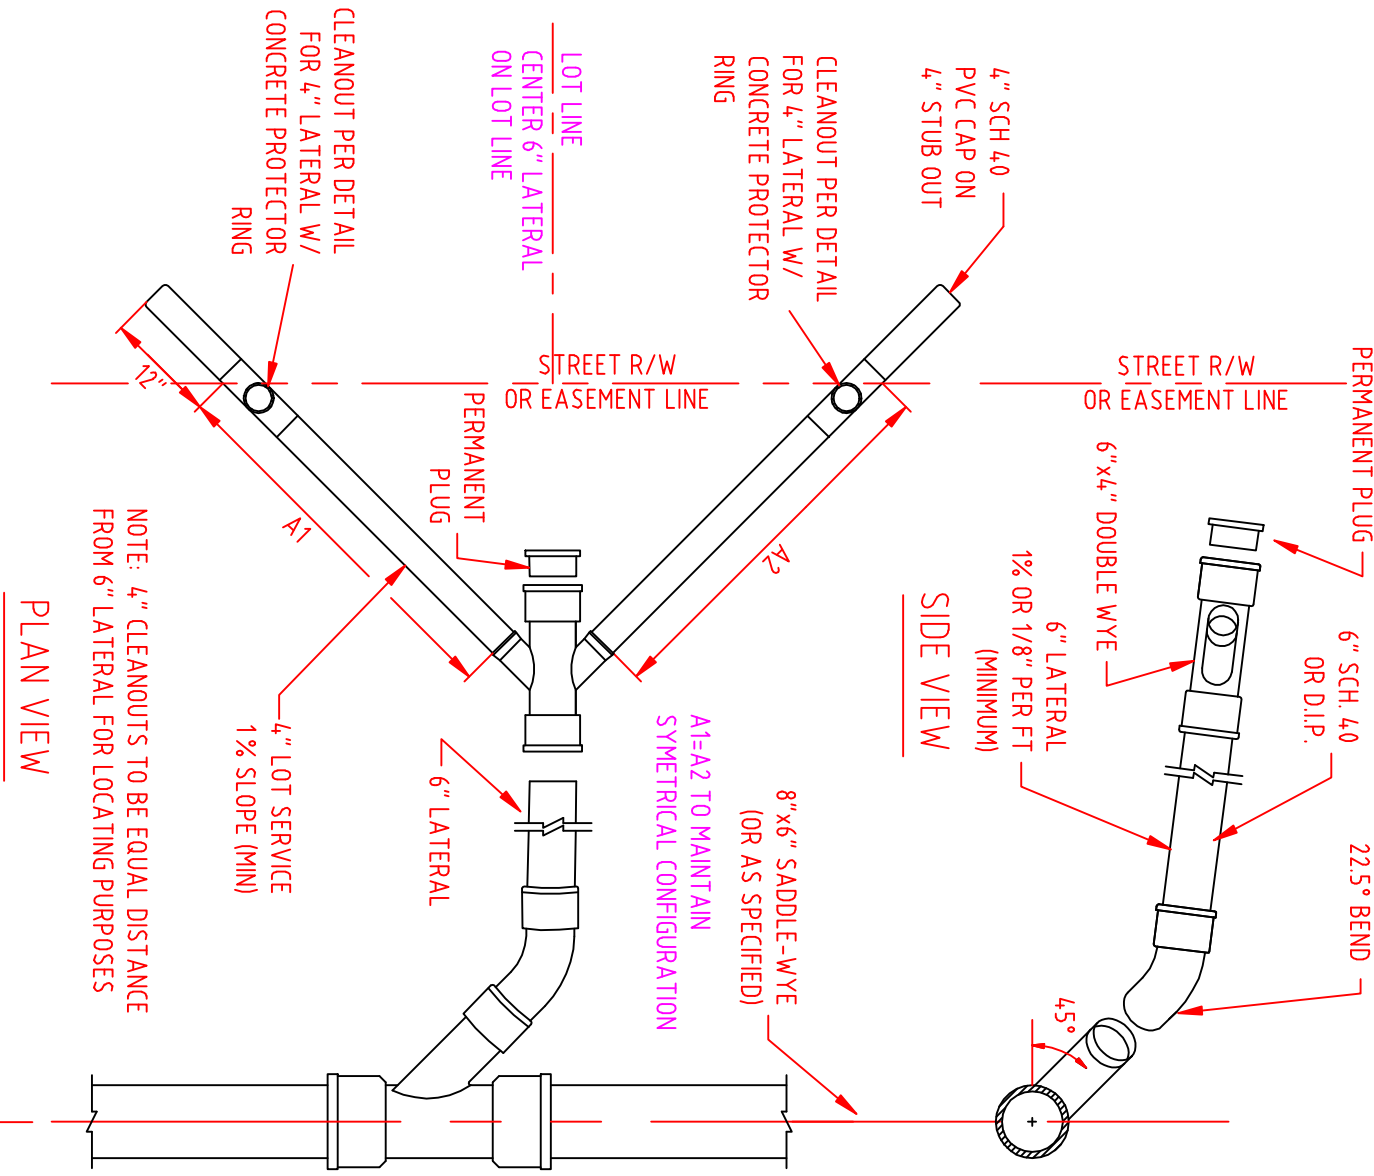

PLAN VIEW

SIDE VIEW

NOTE: 4" CLEANOUTS TO BE EQUAL DISTANCE
FROM 6" LATERAL FOR LOCATING PURPOSES

A1=A2 TO MAINTAIN
SYMMETRICAL CONFIGURATION

8"x6" SADDLE-WYE
(OR AS SPECIFIED)

6" LATERAL
1% OR 1/8" PER FT
(MINIMUM)

6"x4" DOUBLE WYE

6" SCH. 40
OR D.I.P.

45° OR
22.5° BEND

LOT LINE
CENTER 6" LATERAL
ON LOT LINE

STREET R/W
OR EASEMENT LINE

STREET R/W
OR EASEMENT LINE

CLEANOUT PER DETAIL
FOR 4" LATERAL W/
CONCRETE PROTECTOR
RING

CLEANOUT PER DETAIL
FOR 4" LATERAL W/
CONCRETE PROTECTOR
RING

4" SCH 40
PVC CAP ON
4" STUB OUT

PERMANENT
PLUG

PERMANENT PLUG

6" LATERAL

4" LOT SERVICE
1% SLOPE (MIN)

FLOW

UNION COUNTY PUBLIC WORKS DEPARTMENT
UNION COUNTY, N.C.

STANDARD DETAIL
DUAL SEWER LATERAL

SCALE:
N.T.S.
DATE:
11-17-06

11A